Speed Queen
The Proven Performer in Laundry

SPEED QUEEN® MULTI-HOUSING LAUNDRY SOLUTIONS

# Front Control Single Dryer

## Quantum® Gold Pro

Prep for Card | Coin Drop Installed

### Built for Reliable Performance

Speed Queen's dryer, defined by its simplicity and its performance, provides everything you need to get the job done - and nothing you don't. Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Speed Queen's dryers provide the perfect balance of heat, airflow and tumble action for optimal performance and efficiency. Front load products have met every design standard to be 100% ADA compliant.

- Integrated meter case
- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26.875" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder
- Large capacity meter case standard

### Quantum® Gold Pro Control

The Quantum® Gold Pro control delivers a truly premium experience to residents. From intuitive soft touch buttons that walk them through cycle options to multiple actuations (coin, card, mobile) for payment flexibility, this control gives residents the wash and dry options they want, and the revenue potential managers desire.

# Front Control Single Dryer

## Quantum® Gold Pro

| Specifications | | |
|---|---|---|
| Control Option | | Quantum Gold Pro |
| Color | | White |
| Capacity - lb (kg) | | 18 (8.2) |
| Cylinder Volume - cu. ft. (liters) | | 7.0 (198) |
| Motor (Thermal Protected) | | 0.33 HP |
| Type Of Gas (Gas Models Only) | | Factory Equipped Natural |
| Air Outlet Diameter - in (mm) | | 4 (102) |
| Exhaust Airflow - cfm (liters/sec) | | 220 (105) |
| Available Cycles | | High, Medium, Low, Delicates, No Heat |
| Electrical Requirements | Electric | 120/208-240/60/1-30 amp |
| | Gas | 120/60/1-15 amp |
| Heating Element | Electric | 5350W, 240V<br>4750W, 208V |
| | Gas | 25,000 Btu |
| Net Weight - lb (kg) | Electric | 150 (68) |
| | Gas | 150 (68) |
| Shipping Weight - lb (kg) | Electric | 161 (73) |
| | Gas | 161 (73) |
| Shipping Dimensions Approx. - in (mm) | Width | 30.5 (775) |
| | Depth | 29.5 (762) |
| | Height | 45 (1143) |
| Agency Approvals | Electric | cULus |
| | Gas | cCSAus |

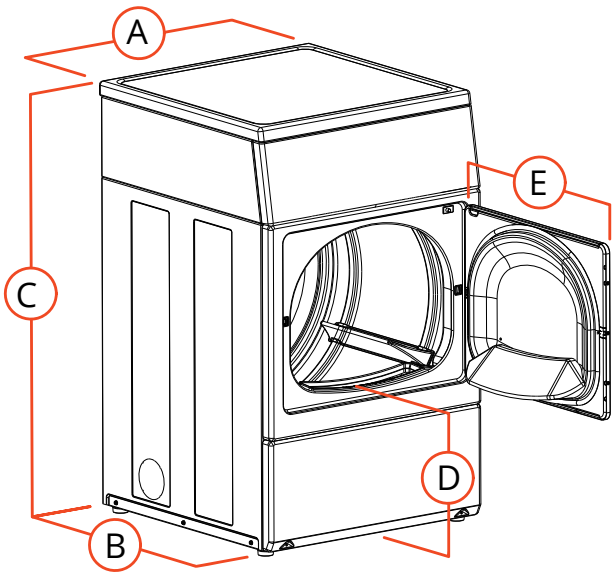


| | | |
|---|---|---|
| A. | Overall Width - in (mm) | 26.875 (683) |
| B. | Overall Depth - in (mm) | 28 (711) |
| C. | Overall Height - in (mm) | 44.34 (1126) |
| D. | Floor To Door Opening - in (mm) | 15.44 (392) |
| E. | Door Swing - in (mm) | 23.5 (597) |

| Models | Voltage/Freq/PH | | Actuation | |
|---|---|---|---|---|
| SDENCAGS176TW01 | 208-240/60/1 | Electric | Coin Drop Installed | |
| SDGNCAGS116TW01 | 120/60/1 | Gas | | |
| SDENYAGS176TW01 | 208-240/60/1 | Electric | Prep For Card | |
| SDGNYAGS116TW01 | 120/60/1 | Gas | | |

Electric dryers come equipped for 208-240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit.
Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

©2021 Alliance Laundry Systems LLC