Speed Queen
The Proven Performer in Laundry

SPEED QUEEN® MULTI-HOUSING LAUNDRY SOLUTIONS

Top Load Washer

Quantum® Gold Pro

Prep for Card | Coin Drop Installed

Built for Reliable Performance

Speed Queen's two-speed top load washer, defined by its simplicity and its performance, provides everything you need to get the job done – and nothing you don't. Speed Queen's top load washer combines heavy-duty construction with reliable operation proven to stand the test of time. Speed Queen® washers provide maximum energy efficiency and long-lasting performance.

- Touch pad control with sound annunciator
- 27 cycle selections
- Extract speed of 710 RPM spins clothes out drier
- Integrated meter case
- Advanced suspension system
- Easy-to-read digital display
- Cycle programming flexibility
- Multi-level vend pricing
- Individual cycle modifier keys
- Durable stainless steel tub standard
- 3.19 cu. ft. (90.3 liters) wash capacity
- Large capacity meter case standard
- Wash Alert™ capability

Quantum® Gold Pro Control

The Quantum® Gold Pro control delivers a truly premium experience to residents. From intuitive soft touch buttons that walk them through cycle options to multiple actuations (coin, card, mobile) for payment flexibility, this control gives residents the wash and dry options they want, and the revenue potential managers desire.

Top Load Washer

Quantum® Gold Pro

Specifications		
Control Option		Quantum Gold Pro
Color		White
Capacity - lb (kg)		16 (7.3)
Overall Width - in (mm)		25.63 (651)
Overall Depth - in (mm)		28 (711)
Overall Height - in (mm)		43 (1092)
Cylinder Volume - cu. ft. (liters)		3.19 (90.3)
Spin Speed G-Force (RPM)		150 (710)
Motor Size - HP (kw)		0.5 (0.37)
Water Consumption Per Cycle - g (liter)*		28.07 (106)
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*		8.8 (1.18)
MEF_{J2} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)*		1.35 (38.2)
Available Water Temperatures		Cold, Warm, Hot
Available Cycles		Normal, Synthetic, Delicate
Electrical Requirements (v/Hz/Ph-Amp)		120/60/1 - 15 Amp
Water Pressure - p.s.i. (bar)		20-120 (1.4/8.3)
Drain		Pump
Cylinder Finish		Stainless Steel
Net Weight - lb (kg)		206 (93.4)
Shipping Weight - lb (kg)		218 (98.8)
Shipping Dimensions Approx. - in (mm)	Width	28 (711)
	Depth	30 (762)
	Height	45 (1143)
Agency Approvals		cULus

Models	Actuation
SWNNC2SP116TW01	Coin Drop Installed
SWNNY2SP116TW01	Prep for Card

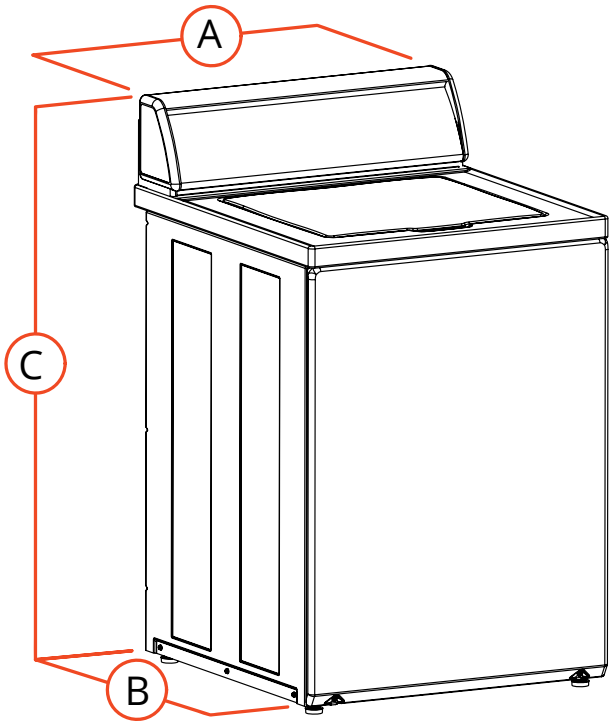

A.	Overall Width - in (mm)	25.625 (651)
B.	Overall Depth - in (mm)	28 (711)
C.	Overall Height - in (mm)	43 (1092)

* Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems of Alliance Laundry Systems are registered to ISO 9001.

©2021 Alliance Laundry Systems LLC