

ON-PREMISES LAUNDRY SOLUTIONS

# Softmount Washer-Extractor

### **PYT135**

135 lb (60 kg)



#### **FEATURES**

- Freestanding, high spin
- Patented Cascade Drum™
- Stainless steel drum and tub
- 2x large drain valves
- Easy Soap™ liquid soaps connection
- Large door opening for easy loading unloading
- Ergonomic height of door enables easy access
- User Friendly control position regardless the user's height
- Soap hopper

#### **XCONTROL FLEX PLATFORM**

- 7" Touch intuitive programming and usage
- Available in 34 languages
- Fully programmable
- 20 preset programs, up to 99 in memory











# Softmount Washer-Extractor

## Specifications

	PYT135
Control Option	X Control FLEX
Capacity - lb (kg)	135 (60)
Overall Width - in (mm)	51.8 (1315)
Overall Depth - in (mm)	59.1 (1502)
Overall Height - in (mm)	75.8 (1925)
Cylinder Diameter - in (mm)	40.7 (1035)
Cylinder Depth - in (mm)	28.2 (716)
Cylinder Volume - cu. ft (liters)	21.2 (601)
Door Opening Size - in (mm)	21.3 (540)
Door Bottom to Floor - in (mm)	33.4 (848)

Wash Speed - RPM		36
Extractor Speed - RPM		788
Extract G-Force		360
Water Inlet Connection - in (mm)		3 x 1.0 (25)
Steam Inlet Connection - in (mm)		0.75 (19)
Drain Diameter - in (mm)		2 x 3 (76)
Motor Power Consumption - HP (kW)		10.0 (7.5)
Voltage/Circuit Breaker - FLA*	208-240/50-60/3	40 - 26.0
Shipping Dimensions Approx in (mm)	Width	56.1 (1425)
	Depth	66.9 (1700)
	Height	83.7 (2125)
Net Weight - lb (kg)		3307 (1500)
Shipping Weight - lb (kg)		3616 (1640)
Agency Approvals		CSA



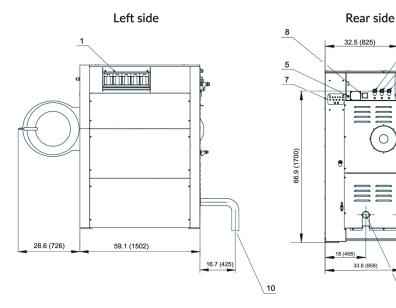

- Soap hopper
- 2. Keyboard
- 3. Emergency stop
- 4. Electrical connection
- 5. Electrical connection to liquid soap
- 6. Main switch
- Liquid soap pump connections

- 8. Air vent tub
- 9. Water connection
- 10. Drain valve

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.