

ON-PREMISE LAUNDRY SOLUTIONS

# Hardmount Washer-Extractor

# **PAN040**

40 lb (18 kg)



### **FEATURES**

- High speed spin up to 200G
- Patented Cascade Drum™
- Stainless steel top, front and side panels
- Stainless steel drum and tub
- Easy Soap™ liquid soaps connection
- Large door opening for easy loading unloading
- Soap hopper

#### **XCONTROL+**

- Fully programmable
- 20 preset programs, up to 99 in memory












Ideas for the future. Answers for today.®

# Hardmount Washer-Extractor

# Specifications

			PAN040
Control Option			X Control+
Capacity - lb (kg)			40 (18)
Overall Width - in (mm)			35.03 (890)
Overall Depth - in (mm)			36.02 (915)
Overall Height - in (mm)			55.51 (1410)
Cylinder Diameter - in (mm)			29.53 (750)
Cylinder Depth - in (mm)			16.14 (410)
Cylinder Volume - cu. ft (liters)			6.4 (181)
Door Opening Size - in (mm)		18.11 (460)	
Door Bottom to Floor - in (mm)		18.31 (465)	
Wash Speed - RPM		42	
Extractor Speed - RPM		690	
Extract G-Force		200	
Water Inlet Connection - in (mm)		2 x 0.75 (19)	
Steam Inlet Connection - in (mm)			0.5 (13)
Drain Diameter - in (mm)			3 (76)
Motor Power Consumption - HP (kW)			1 (0.75)
Voltage Wires/Circuit Breaker - FLA*	208-240/60/1		15-9.1
Shipping Dimensions	Wic	lth	36.42 (925)
Approx- in (mm)	Dep	oth	38.19 (970)
	Hei	ght	61.02 (1550)
Net Weight - lb (kg)			695 (315)
Shipping Weight - lb (kg)			739 (335)
Agency Approvals			CSA

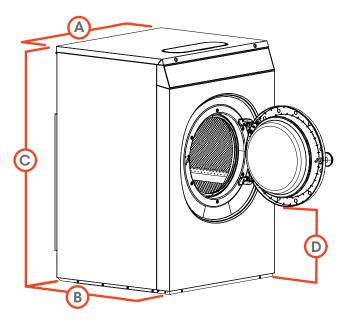

Α.	Overall Width - in (mm)	35.03 (890)
В.	Overall Depth - in (mm)	36.02 (915)
C.	Overall Height - in (mm)	55.51 (1410)
D.	Door Bottom to Floor - in (mm)	18.31 (465)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001. 2023 Specifications

OPLS by WASH is manufactured by Alliance Laundry Systems LLC

