

Washer Extra Dry WASCOMAT WED SERIES

Combining world-class reliability with innovative features and programmability, **Wascomat washers are designed to work as a system with Wascomat dryers.** The washer initiates the drying process which means, the higher the G-force, the more water is extracted from the laundry. This speeds up the drying process, saving energy, time, and money.



Wascomat WED Washers continue a long tradition of excellence in technology, design, and quality.

- Touchscreen control with 7" HD color display
- Automatic Savings (AS) determines the exact load weight and adds precisely the right amount of water for significant savings
- Robust door handle – durable in any environment
- Door unlocks immediately at the end of final cycle – no delays
- Unique 4-compartment supply dispenser
- Extended machine life with Super Balance
- Sanitizing Rinse generates customer loyalty, gives customers peace of mind
- Text messaging and voice guidance features (optional)
- Innovative LaundryPulse and LaundryPay (optional)
- Interchangeable parts from one machine size to another

Features and Benefits

Touchscreen Offers Unprecedented Control:

- 10 built-in wash cycles with the ability to create 180+ custom programs to lower costs and meet customer demands for your specific market
- Cycle upgrade options increase store revenue and boost customer satisfaction
- Display information in 35 different languages
- Walk up screens can be customized for a fully branded experience
- Real-time clock for happy hour, promotional pricing

Eco-Friendly Solutions

Wascomat products are engineered for quality, energy savings, and water efficiency. When you buy Wascomat, you are truly investing in the future of your business.

Touchscreen Control

The advanced 7" HD color touchscreen features 10 built-in wash cycles, 180+ custom programs, and 35 available languages.

Perfect Fit

Most sizes available in 220 or 120 volt, single phase. Now it's easy to replace old, inefficient top-load or front-load washers with new Wascomat equipment.

LaundryPay Transforms the Laundry Experience for Your Customers

Attract new customers and build loyalty by providing the most convenient laundry service available. With our LaundryPay App, your customers can pay through their smartphone, view machine availability, and receive a notification when their wash cycle is complete.

Ultimate Control with LaundryPulse

Remotely monitor, manage, and control your business – from anywhere at any time with Laundry Pulse. Get instant service alerts, performance data, real-time revenue and utilization reports, diagnostic info, and more delivered right to your phone. You can even remotely adjust pricing and create promotional campaigns to generate business on slower days.




Wascomat "WED" Series Washers	WED720-CV		WED725-CV		WED730-CV		WED745-CV		WED765-CV		WED785-CV	
Capacity (lb/kg)	20	9	25	11	30	14	45	20	62	28	77	35
A. Width (in/mm)	26	660	28 3/8	720	28 3/8	720	29 1/2	750	32 11/16	830	35 13/16	910
B. Height (in/mm)	44 11/16	1135	48 1/16	1220	48 1/16	1220	52 15/16	1345	56 5/16	1430	57 11/16	1465
C. Depth (overall) (in/mm)	28 9/16	725	27 9/16	700	31 1/8	790	36	915	40 9/16	1030	43 7/8	1115
D. Height to bottom of door (in/mm)	14 3/16	360	14 9/16	370	14 9/16	370	17 5/16	440	18 1/2	470	19 7/8	505
Door opening diameter (in/mm)	12 3/16	310	14 3/8	365	14 3/8	365	15 9/16	395	17 1/8	435	17 1/8	435
Cylinder volume (ft ³ /l)	3	85	3.7	105	4.6	130	6.4	180	8.8	250	11.7	330
Drain outlet diameter (in/mm)	3	75	3	75	3	75	3	75	3	75	3	75
Height to centerline of drain (in/mm)	4 1/8	105	4 1/8	105	4 1/8	105	4 1/8	105	4 1/8	105	4 1/8	105
Extract (rpm/G-Force)	830 / 200		776 / 200		776 / 200		742 / 200		702 / 200		671 / 200	
Dynamic floor load (lb/kN) @ max extraction	380 +/- 840	1.7 +/- 3.8	420 +/- 980	1.9 +/- 4.4	510 +/- 1200	2.3 +/- 5.4	670 +/- 1500	3 +/- 6.7	860 +/- 1850	3.8 +/- 8.3	950 +/- 2210	4.3 +/- 9.9
Dynamic frequency (Hz)	13.8		12.9		12.9		12.4		11.7		11.2	
Noise level (dBA) in extraction	<75		<71		<72		<74		<76		<75	
Crated width - (in/mm)	27 3/16	690	29 1/2	750	29 1/2	750	30 11/16	780	33 7/8	860	37	940
Crated depth - (in/mm)	32 11/16	830	35 1/16	890	37 3/8	950	39 3/16	995	43 11/16	1110	47 1/16	1195
Crated height - (in/mm)	48	1219	53 1/8	1350	53 1/8	1350	56 7/16	1434	61 1/4	1556	62 7/16	1586
Crated weight (lb/kg)	251	114	335	152	340	154	487	221	578	262	677	307

Electrical Requirements (standard)												
Voltage/frequency/phase	208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1	
Power (kW) / Ckt breaker (A)	0.4 / 15		0.5 / 15		0.5 / 15		0.7 / 15		1.1 / 15		1.3 / 15	
Voltage/frequency/phase	120/60/1		120/60/1		120/60/1		120/60/1		120/60/1		120/60/1	

Water Information												
Inlet fittings (* = 3 inlets)	3/4	DN20	3/4	DN20	3/4	DN20	3/4*	DN20*	3/4*	DN20*	3/4*	DN20*
Flow (gpm/lpm @ 44 psi) (each inlet)	5	20	5	20	5	20	8	30	16	60	16	60
Recommended water pressure (psi/kPa)	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600
Water Consumption 6L31 Full Load Warm Cycle - Total Water (Gallon)	29.6		34.9		40.7		64.2		85.3		118.9	
Hot Water / Cold Water (Gallon)	2.1 / 27.5		2.6 / 32.2		3.2 / 37.5		5.0 / 59.2		6.3 / 79.0		8.3 / 110.6	
1. Water temperature 59°F cold water and 149°C hot water. 2. Default Warm program (6L31)												
Modified Energy Factor	2.1		2.1		2.2		2.3		2.0		2.0	
Integrated Water Factor	4.0		3.9		3.9		4.0		4.0		4.0	

Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact LaundryLux for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. LaundryLux assumes no responsibility for errors or omissions in this information.

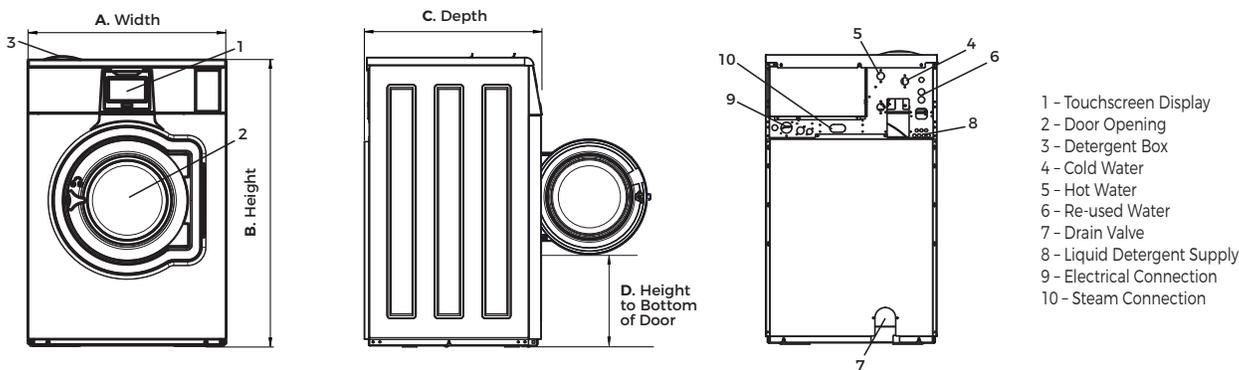

Front Panel Options



800.645.2204 • laundrylux.com

Laundrylux • 461 Doughty Blvd., Inwood, NY 11096-0338

Sales & Administration: 516-371-4400 • F 516-371-4204 • sales@laundrylux.com
Parts: 516-371-2000 • F 516-371-4029 • parts@laundrylux.com
Tech Support: 516-371-0700 • F 516-371-4029 • service@laundrylux.com

En Mexico: Llame gratis a este numero 001-800-010-1010