

OPLS™

by **WASH**

ON-PREMISE LAUNDRY SOLUTIONS

Softmount Washer-Extractor

PYN055

55 lb (24 kg)



FEATURES

- Freestanding, high speed spin up to 400G
- Patented Cascade Drum™
- Stainless steel top, front and side panels
- Stainless steel drum and tub
- Easy Soap™ - liquid soaps connection
- Large door opening for easy loading unloading
- Ergonomic height of door enables easy access
- Soap hopper

XCONTROL+

- Fully programmable
- 20 preset programs, up to 99 in memory




ERGONOMIC
CONSTRUCTION



LARGE DOOR
OPENING



LOW WATER
AND ENERGY
CONSUMPTION

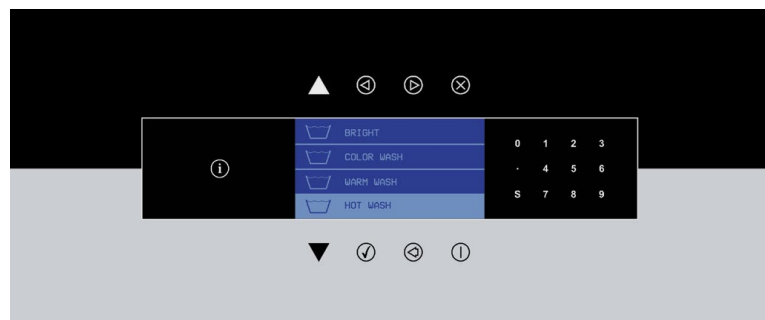


WASH
COMMERCIAL LAUNDRY

800-236-5599 | www.wash.com/on-premise

Softmount Washer-Extractor

Specifications

		PYN055
Control Option		XControl+
Capacity - lb (kg)		55 (24)
Overall Width - in (mm)		38.18 (970)
Overall Depth - in (mm)		43.5 (1105)
Overall Height - in (mm)		55.51 (1410)
Cylinder Diameter - in (mm)		29.53 (750)
Cylinder Depth - in (mm)		21.46 (545)
Cylinder Volume - cu. ft (liters)		8.5 (240)
Door Opening Size - in (mm)		18.11 (460)
Door Bottom to Floor - in (mm)		18.77 (477)
Wash Speed - RPM		42
Extractor Speed - RPM		980
Extract G-Force		400
Water Inlet Connection - in (mm)		2 x 0.75 (19)
Steam Inlet Connection - in (mm)		0.5 (13)
Drain Diameter - in (mm)		3 (76)
Motor Power Consumption - HP (kW)		4.02 (3.00)
Voltage / Circuit Breaker - FLA*	208-240/60/1	20 - 15
Shipping Dimensions Approx.- in (mm)	Width	40.35 (1025)
	Depth	45.28 (1150)
	Height	61.02 (1550)
Net Weight - lb (kg)		948 (430)
Shipping Weight - lb (kg)		992 (450)
Agency Approvals		CSA

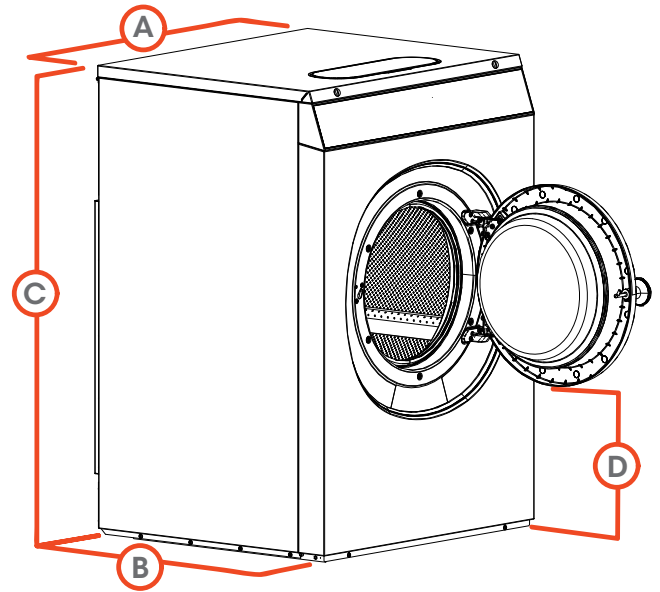

A.	Overall Width - in (mm)	38.18 (970)
B.	Overall Depth - in (mm)	43.5 (1105)
C.	Overall Height - in (mm)	55.51 (1410)
D.	Door Bottom to Floor - in (mm)	18.77 (477)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

April 2026 Specification

OPLS by WASH is manufactured by Alliance Laundry Systems LLC



800-236-5599 | www.wash.com/on-premise